

HARNESSES
& LANYARDS
MADE IN THE USA



VIEW OUR
FULL CATALOG



MINERS CATALOG

"THE ULTIMATE IN FALL PROTECTION"





MINERS BELT

Email us at: info@ultrasafeusa.com • www.UltraSafeUSA.com





Miners belt. Customize your size on this unit.
Overalls can be added along with a back pouch for respirator.

98101AMB

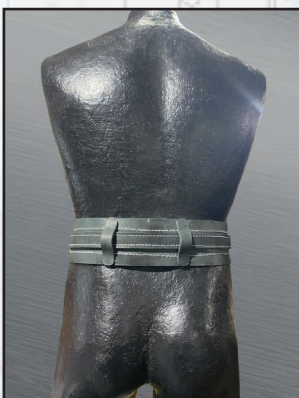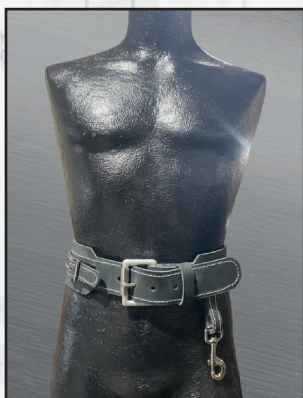

Miners belt. Customize your size on this unit.
Overall can be added with back pouch for respirator.



98101M (SMALL)
98102M (MEDIUM)
98103M (LARGE)
98104M (XLARGE)
98105M (2XLARGE)

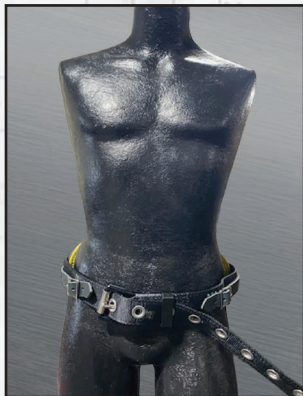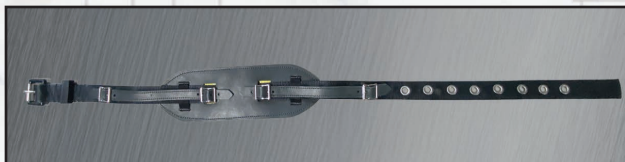

MINERS BELT



Call **1.877.711.1155** to find an **ULTRA-SAFE** dealer near you!

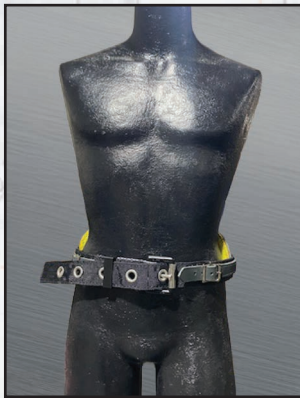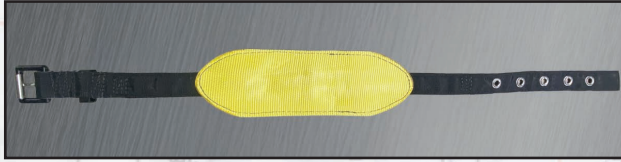

Miners belt. Customize your size on this unit. Overall can be added with back pouch for respirator. Includes D-ring.

- 98101MD (SMALL)
- 98102MD (MEDIUM)
- 98103MD (LARGE)
- 98104MD (XLARGE)
- 98105M (2XLARGE)



Miners belt. Customize your size on this unit. With overall. Back pouch can be added for respirator.

- 98105HDMB



HARNESSES & LANYARDS

Email us at: info@ultrasafeusa.com • www.UltraSafeUSA.com

Designed to last longer in emulation and corrosive environments.



**Full Body Harness,
Iron Worker's Type.
Back Pad and Tool
Belt. Tongue-Buckle
Connections.**

98305NTQLMX Sm-Lg
98306NTQLMX XL



**D-Ring Center Back.
Quick Release
Buckles, Mini-X
w/ Padded Legs.**

98305NQLMX Sm-Lg
98306NQLMX XL



**D-Ring Center Back,
Each Hip. Tongue
Buckle Legs, Quick
Release Chest. X-Pad,**

98395BQL Sm-Lg
98396BQL XL



**Ultra Pillow-Flex
D-Ring Center Back.
Quick Release Buckles
Padded Legs.**

UPF-98305NQL Sm-Lg
UPF-98306NQL XL



**D-ring Center Back,
Quick Release w/
Padded Legs and
X-Pad.**

UF-98305NQLMX
Sm-Lg
UF-98306NQLMX
XL



**Shock absorbing lanyard with
double large hooks each end**
96516YCT 1 3/4" x 6'



**Ultra-Tube shock-absorbing
lanyard with large hook.**
UT-96514CT 1" x 6'



**Ultra-Tube shock-absorbing
lanyard with D-ring and large hook.**
UTT-96516CTD 1" x 6'

CUSTOMIZE YOUR HARNESS

UltraSafe is excited for the 2026 safety season with a wide variety of new products as well as our existing lines. UltraSafe prides itself on their domestic on-site individual sewing department. Having an

in-house sewing department allows UltraSafe to customize every detail of your harness. Harnesses can be customized with your design, colors, and even embroidered company logos on the webbing.

KEVLAR PRODUCTS

Call **1.877.711.1155** to find an **ULTRA-SAFE** dealer near you!



Designed to last longer in emulation and corrosive environments.



**Single D-Ring harness
w/parachute buckles.
For welders and hot
work.**

96305NK Sm-Lg
96306NK XL



**Three D-Ring harness
w/parachute buckles.
For welders and hot
work.**

96305K Sm-Lg
96306K XL



**Nomex®/Kevlar®
web, with soft loop
D-ring, quick release
buckles and comfort
padding**

96305NKQLAR Sm-Lg
96306NKQLAR XL



**Nomex®/Kevlar®
web, with soft loop
D-rings back and
sides, quick release
buckles and comfort
padding**

96305KQLAR Sm-Lg
96306KQLAR XL



**Shock absorbing lanyard with
double locking hooks each end**
96516K 1 3/4" x 6'



**Shock absorbing Y-lanyard with
double locking hooks each end
100% tie-off**
96516KY 1 3/4" x 6'



**Shock absorbing Y-lanyard with
double locking hook and large
rebar hooks 100% tie-off**
96516KYCT 1 3/4" x 6'

To top it all off we carry the best retractables on the market. UltraSafe also provides simple concrete anchor points to complex anchoring systems for all of your tie off needs.



Yellow, Blue, Green, Orange,
Red, White, Gold, Silver & Black.



Klear Kote®




Embroidered



RETRACTABLES **CLASS 2**

Email us at: info@ultrasafeusa.com • www.UltraSafeUSA.com

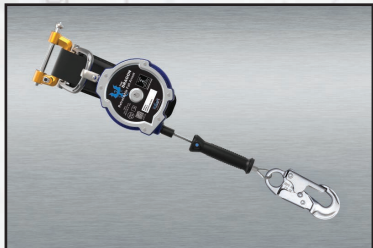

RD-HN8 - 8' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes snap hook (96595).

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2




RD-HN8CT - 8' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes steel rebar hook.

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2




RD-HN8CA - 8' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes large aluminum rebar hook.

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2

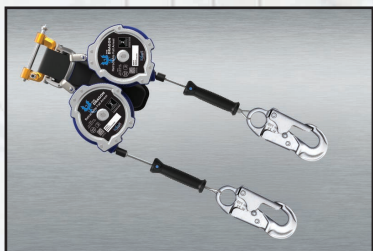


RD-HNY8 - 8' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes two snap hooks (96595).

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2

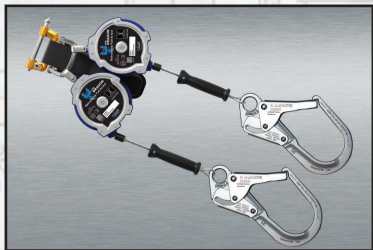

RD-HNY8CT - 8' Wire Y-Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes two steel rebar hooks.

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2

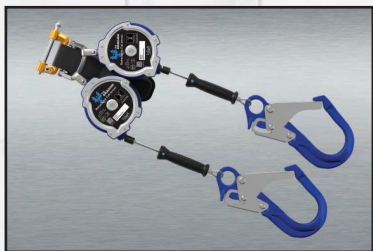

RD-HNY8CA - 8' Wire Y-Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes two large aluminum rebar hooks.

Housing:	Stainless Steel	Capacity (ANSI):	310 lbs
Cable:	3/16" Galvanized Steel	Overhead Capacity (OSHA):	420 lbs
Avg Arresting Force (ANSI):	1,350 lbs.	Complies with:	ANSI Z359.14-2021 Class 2

RETRACTABLES **CLASS 2**

Call **1.877.711.1155** to find an **ULTRA-SAFE** dealer near you!



RD-HN11 - 11' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2



RD-HN15 - 15' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2



RD-HN20 - 20' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2



RD-HN30 - 30' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2



RD-HN50 - 50' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2



RD-HN66 - 66' Wire Retractable Lanyard with 3,600 lb Gates Top and Bottom. Includes carabiner.

Housing: Thermoplastic/Aluminum	Capacity (ANSI): 310 lbs
Cable: 3/16" Galvanized Steel	Overhead Capacity (OSHA):.....420 lbs
Avg Arresting Force (ANSI): 1,350 lbs.	Complies with: ANSI Z359.14-2021
	Class 2





TRIPOD & RETRIEVAL UNITS

Email us at: info@ultrasafeusa.com • www.UltraSafeUSA.com



Tri-Max Tripod

US-TRI-MAX

- Lightweight yet durable construction provides anchorage for fall protection.
- Tripod Legs : Extruded Aluminum AnkletGalvanized Steel

Weight: 61.7 lbs

Max Height: 8 ft

Min Height: 5 ft

Capacity: 2 persons (Max 310 lbs. per person)

Rated: 5,000 lbs anchor point

US-N-TR3465-66

- SRL-R 3-Way system for fall protection

Housing: Aluminum

Cable: 3/16" Galvanized Steel

Working Length: 66ft

Weight : 35.3 lb

US-N-TR218-66


- Winch - Perfect for elevating and lowering materials or tools to workers engaged in tasks within confined spaces.

Housing: Steel

Cable: 3/16" Galvanized Steel

Working Length: 66ft

Weight : 26.5 lb



The three-pulley system allows versatile use in multiple directions.



5,000 lb. anchor points.



Carrying bag.

LEVEL	HEIGHT	DIAMETER
L1	61"	43"
L2	67"	50"
L3	73"	54"
L4	78"	59"
L5	84"	64"
L6	90"	73"
L7	100"	77"

**CALL FOR
PRICING &
AVAILABILITY
TODAY**

TRIPOD & RETRIEVAL UNITS

Call **1.877.711.1155** to find an **ULTRA-SAFE** dealer near you!



Pro-3 Tripod

US-40014

- BTS-Klick dual action quick release buttons for fast and reliable height adjustment.
- Lightweight aluminium construction.
- Tripod head features integrated pulley wheel allowing for winch wire cable to pass through center of Tripod.
- Additional rated 3 tie-off points in the Tripod head for attaching additional personal fall protection equipment.
- Powder coated in Hi-Vis Safety Orange for ease of identification in trafficable work areas.
- Compatible for use with other reputable height safety manufacturer winches.
- Tripod comes complete in canvas storage bag with wheels for ease of storage and transport by one person.
- Minimal set up required.
- Can be assembled by one person.

Weight: 45.5 lbs

Max Height: 9.82 ft

Max Diameter: 78.74 inches


Min Height: 5.04 ft

Capacity: 2 persons (Max 310 lbs. per person)

Rated: 5,000 lbs anchor point

Man Rated 3 Way Winch: 65ft • 100ft • 150 ft

Material Winch: 60 ft

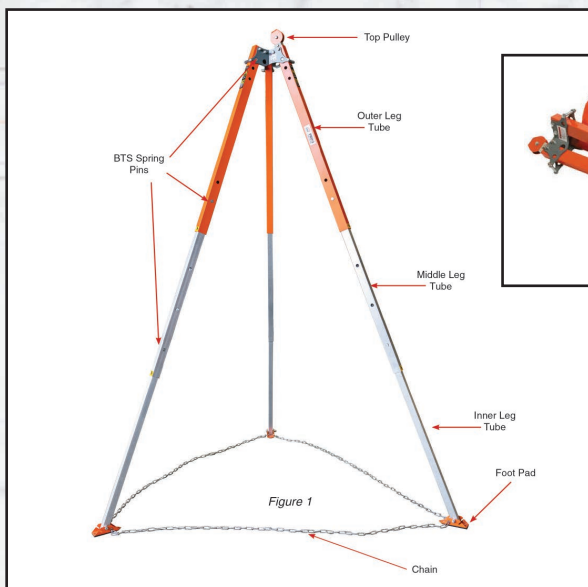



DAVIT ARM, BASES & ACC.

Email us at: info@ultrasafeusa.com • www.UltraSafeUSA.com

**CALL FOR
PRICING &
AVAILABILITY
TODAY**



Pro-6 Davit - US-5056


Modular system, requires no bolts, nuts or pins to assemble.
Made out of lightweight material graded 6061-T6 Aluminum

Maximum number of users: Max. 2 users,
no more than 310 lbs per anchor point.

Minimum and Max reach: 1.64ft-2.46ft

Min and Max height: 6.43ft-9.15ft

Ultimate strength rating: Jib 3372 lbs Mast 5000 lbs

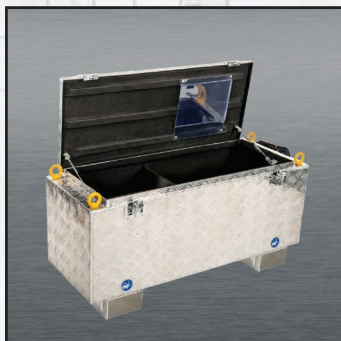

**Aluminium Storage Box
for PRO-3G Davit**

US-30206




BTECH Storage/Carry Bag

US-BTS40003B

Heavy Duty Floor Mount - Stainless Steel

US-BFMDBo1SS

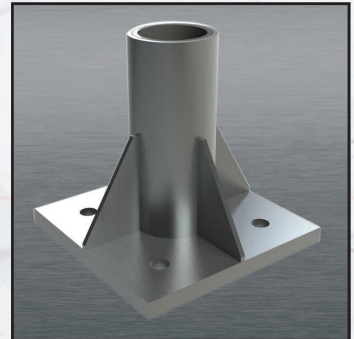

Wall Mount 4 point Hot Dip Gal (MS)

US-BTS0024



PRO-3G & 6G Barrel Mount Base Adjustable Throat

Grip range:

0.78" - 8.07"

Weight: 55 lbs

Fits: Pro-3G &
6G davits

US-30166R



FleXbase Portable Davit Base

Fits: Pro-3G &
6G davits

Max capacity:

Two users at
300 lbs each

US-30075



Call **1.877.711.1155** to find an **ULTRA-SAFE** dealer near you!

LOCKING SNAP HOOKS



Locking Snap Hooks

	Throat
96595A Small aluminum hook	3/4"
96595 Double-locking lanyard snap	7/8"
96595S Double-locking swivel snap	7/8"
96597 Large rebar hook	2"
96597CT Large rebar hook	2-1/4"
96597CA Large rebar hook - Aluminum	2-1/4"
96597CTS Large rebar hook w/swivel	2-1/4"
96597CAS Large Alum. Rebar Hook w/swivel	2 - 1/4"

Call for a quote today!

CARABINERS



Carabiners and Rollgate Hooks

	Throat
96594A Small carabiner - Aluminum	3/4"
96594 Small carabiner	1"
96595BB Choke-Back hook with roll gate	7/8"
96595ABB Choke-Back hook with roll gate Aluminum	3/4"
96595SBB Swivel Choke-Back hook with roll gate	7/8"
96596MC Medium carabiner	1-1/4"
96598 Large carabiner	2-1/4"
96598A Large carabiner, Aluminum	2-1/4"

SIZE DATA SHEET FOR WORKERS UP TO 400 POUNDS

Requirements applicable to personal fall arrest equipment used by workers weighing up to 400 pounds (including personal weight, weight^o of clothing, tools and objects worn by the worker).

We can customize any style harness. call for a quote today!

EMPLOYEE (USER) INFORMATION

Name: _____

Torso Length: _____

Chest Circumference: _____

Waist Circumference: _____

Upper Thigh Circumference: _____

Hip/Seat Circumference: _____

Body Weight: _____

Total Weight: _____

(Including clothing and tools)

EMPLOYEE (USER) INFORMATION

Company: _____


Address: _____

Phone: _____

Fax: _____

Supervisor: _____

Products/Systems Sought: _____

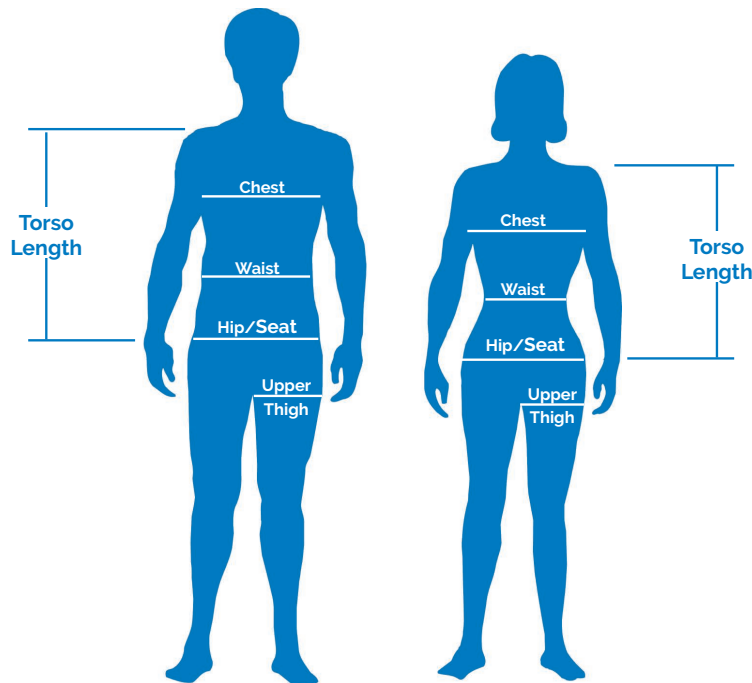

Contact **ULTRA-SAFE** for a dealer near you
call **1-877-711-1155** • Fax: **602-894-1505**
email info@ultrasafeusa.com or visit our web site at: www.ultrasafeusa.com
1505 North 29th Avenue • Phoenix, AZ 85009