ULTRA-SAFE
INC.
"The Ultimate in Fall Protection"
Explore Our
Full Website

96094BPT

PFX-96305TQL

UFX-96396BQLTPTC

UX-98305FQLTP

UF-96396BMX

UPFX-96096BFMSQL

9609BFPT

96307

UUF-96305QLMXTP

U-98305NT

UT-96516LYCA

96516YSR

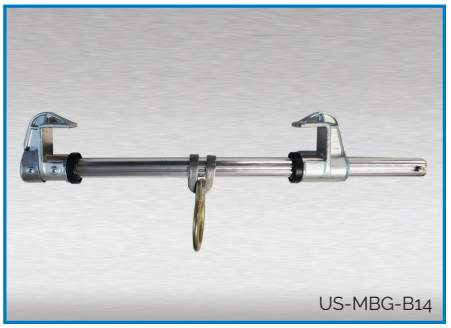
US-MBG-B14

UT-96516LYCA

96426SSR

96516YSR

Roof Anchor Kit.

First Anchor Up Kit.

Rescue Kit

PHX SERIES ULTRA-SAFE SRL

COMPLIES WITH ANSI Z359.14-2021

TRI-MAX TRIPOD

US-TRI-MAX - Lightweight but durable. Extruded aluminum / galv. steel.
US-N-TR3465-66 - 66' 2 Person SRL-R 3 way system for fall protection
US-N-TR216-66 - 66' Material Winch

WEIGHT	61.7 LBS
MAX HEIGHT	8 FT
MIN HEIGHT	5 FT
CAPACITY	2 PERSON (MAX 310 LBS EA)
RATED	5,000 LBS ANCHOR POINT

Includes carrying bag.



The three-pulley system allows versatile use in multiple directions.

5,000 lb. anchor points.

HORIZONTAL 100' SYSTEM

US-96960-100

Horizontal 100' System 2 Person Rated – Synthetic

The unit consists of the following:

- 2 – 6' anchor slings
- 2 – Carabiners
- 1 - 12 strand polyester rope
- 1 – Tensioning device
- 1 - Carrying bag

CABLE SAFETY CLIMB LADDER SYSTEM

US-5060CS

Cable Safety Climb System 60 Galvanized Steel Cable

The unit consists of the following:

- Sealed anchor head
- Adjustable clamp brackets
- H.D. steel square tubing supports
- Cable stand-off (every 30 ft.)
- 3/8" dia. Stainless Steel wire rope. 60' reach
- Lower eye bolt adjusts tension
- Recommended torque 65 ft/lbs. Minimum

Other Lengths Available.

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

Class 1 Anchor at or above dorsal D-ring

WIRE SRL - PHX SERIES

PART NUMBER	WORKING LENGTH	WEIGHT
RD-HN11-C1	11 ft / 3 m	5.6 lbs / 2.5 kg
RD-HN20-C1	20 ft / 6 m	7.2 lbs / 3.3 kg
RD-HN30-C1	30 ft / 9 m	8.3 lbs / 3.8 kg
RD-HN50-C1	50 ft / 15 m	14.8 lbs / 6.7 kg
RD-HN66-C1	66 ft / 20 m	19.8 lbs / 9.0 kg

- New & Improved Design
- Comes complete with carabiner.
- **YES! - THESE UNITS ARE REPAIRABLE!**

Includes 96594

Class 1 Anchor at or above dorsal D-ring

ULTRA-LEAF WEB SRL - PHX SERIES

RD-HPS8L-C1 - Includes a snap hook
RD-HPS11L-C1 - Includes a snap hook
RD-HPS20L-C1 - Includes a snap hook

HOUSING	THERMOPLASTIC
WEBBING	3/4" UHMWPE
WORKING LENGTH	8 FT / 11 FT / 20 FT
MAX ARREST DISTANCE (ANSI)	24 INCHES
AVG ARRESTING FORCE (ANSI)	1,350 LBS
CAPACITY (ANSI) / (OSHA)	310 LBS / 420 LBS
WEIGHT	2.58 LBS

Includes 96594

Class 1 Anchor at or above dorsal D-ring

ULTRA-LEAF WEB SRL - PHX SERIES

RD-HPS6L-C1 - Includes a snap hook
RD-HPS8L-C1 - Includes a snap hook

HOUSING	THERMOPLASTIC
WEBBING	3/4" UHMWPE
WORKING LENGTH	6 FT / 8 FT
MAX ARREST DISTANCE (ANSI)	24 INCHES
AVG ARRESTING FORCE (ANSI)	1,350 LBS
CAPACITY (ANSI) / (OSHA)	310 LBS / 420 LBS
WEIGHT	4.08 LBS

OPTIONAL HOOKS

CT

CA

PHX SERIES ULTRA-SAFE SRL

COMPLIES WITH ANSI Z359.14-2021

Class 2 Anchor above or below dorsal D-ring

WIRE SRL - PHX SERIES

PART NUMBER	WORKING LENGTH	WEIGHT
RD-HN11	11 ft / 3 m	5.6 lbs / 2.5 kg
RD-HN20	20 ft / 6 m	7.2 lbs / 3.3 kg
RD-HN30	30 ft / 9 m	8.3 lbs / 3.8 kg
RD-HN50	50 ft / 15 m	14.8 lbs / 6.7 kg
RD-HN66	66 ft / 20 m	19.8 lbs / 9.0 kg

- New & Improved Design
- Comes complete with carabiner.
- **YES! - THESE UNITS ARE REPAIRABLE!**

Class 2 Anchor above or below dorsal D-ring

8' WIRE SRL - PHX SERIES JETPACK

Wire Retractable Lanyard with 3,600 lb Gate

PART NUMBER	INCLUDES
RD-HN8	Includes a small steel hook (96595)
RD-HN8CT	Includes a large steel rebar hook
RD-HN8CA	Includes a large aluminum rebar hook
RD-HN8	Includes two small steel hooks (96595)
RD-HN8CT	Includes two large steel rebar hooks
RD-HN8CA	Includes two large aluminum rebar hooks

OPTIONAL HOOKS

CT

CA

MCT

TRAUMA RELIEF STRAP

US-TSC

Avoid the effects of suspension trauma with the use of trauma relief straps.

1. Extremely effective, specially designed to help relieve the negative effects of suspension trauma.
2. Compact and light in weight, hence does not hamper the activity of worker while at work.
3. Allows the suspended worker to stand up in his harness to relieve pressure.
4. Easy to attach to the harness with the help of the textile loop and velcro provided.
5. Easy deployment. Operation is fool-proof.

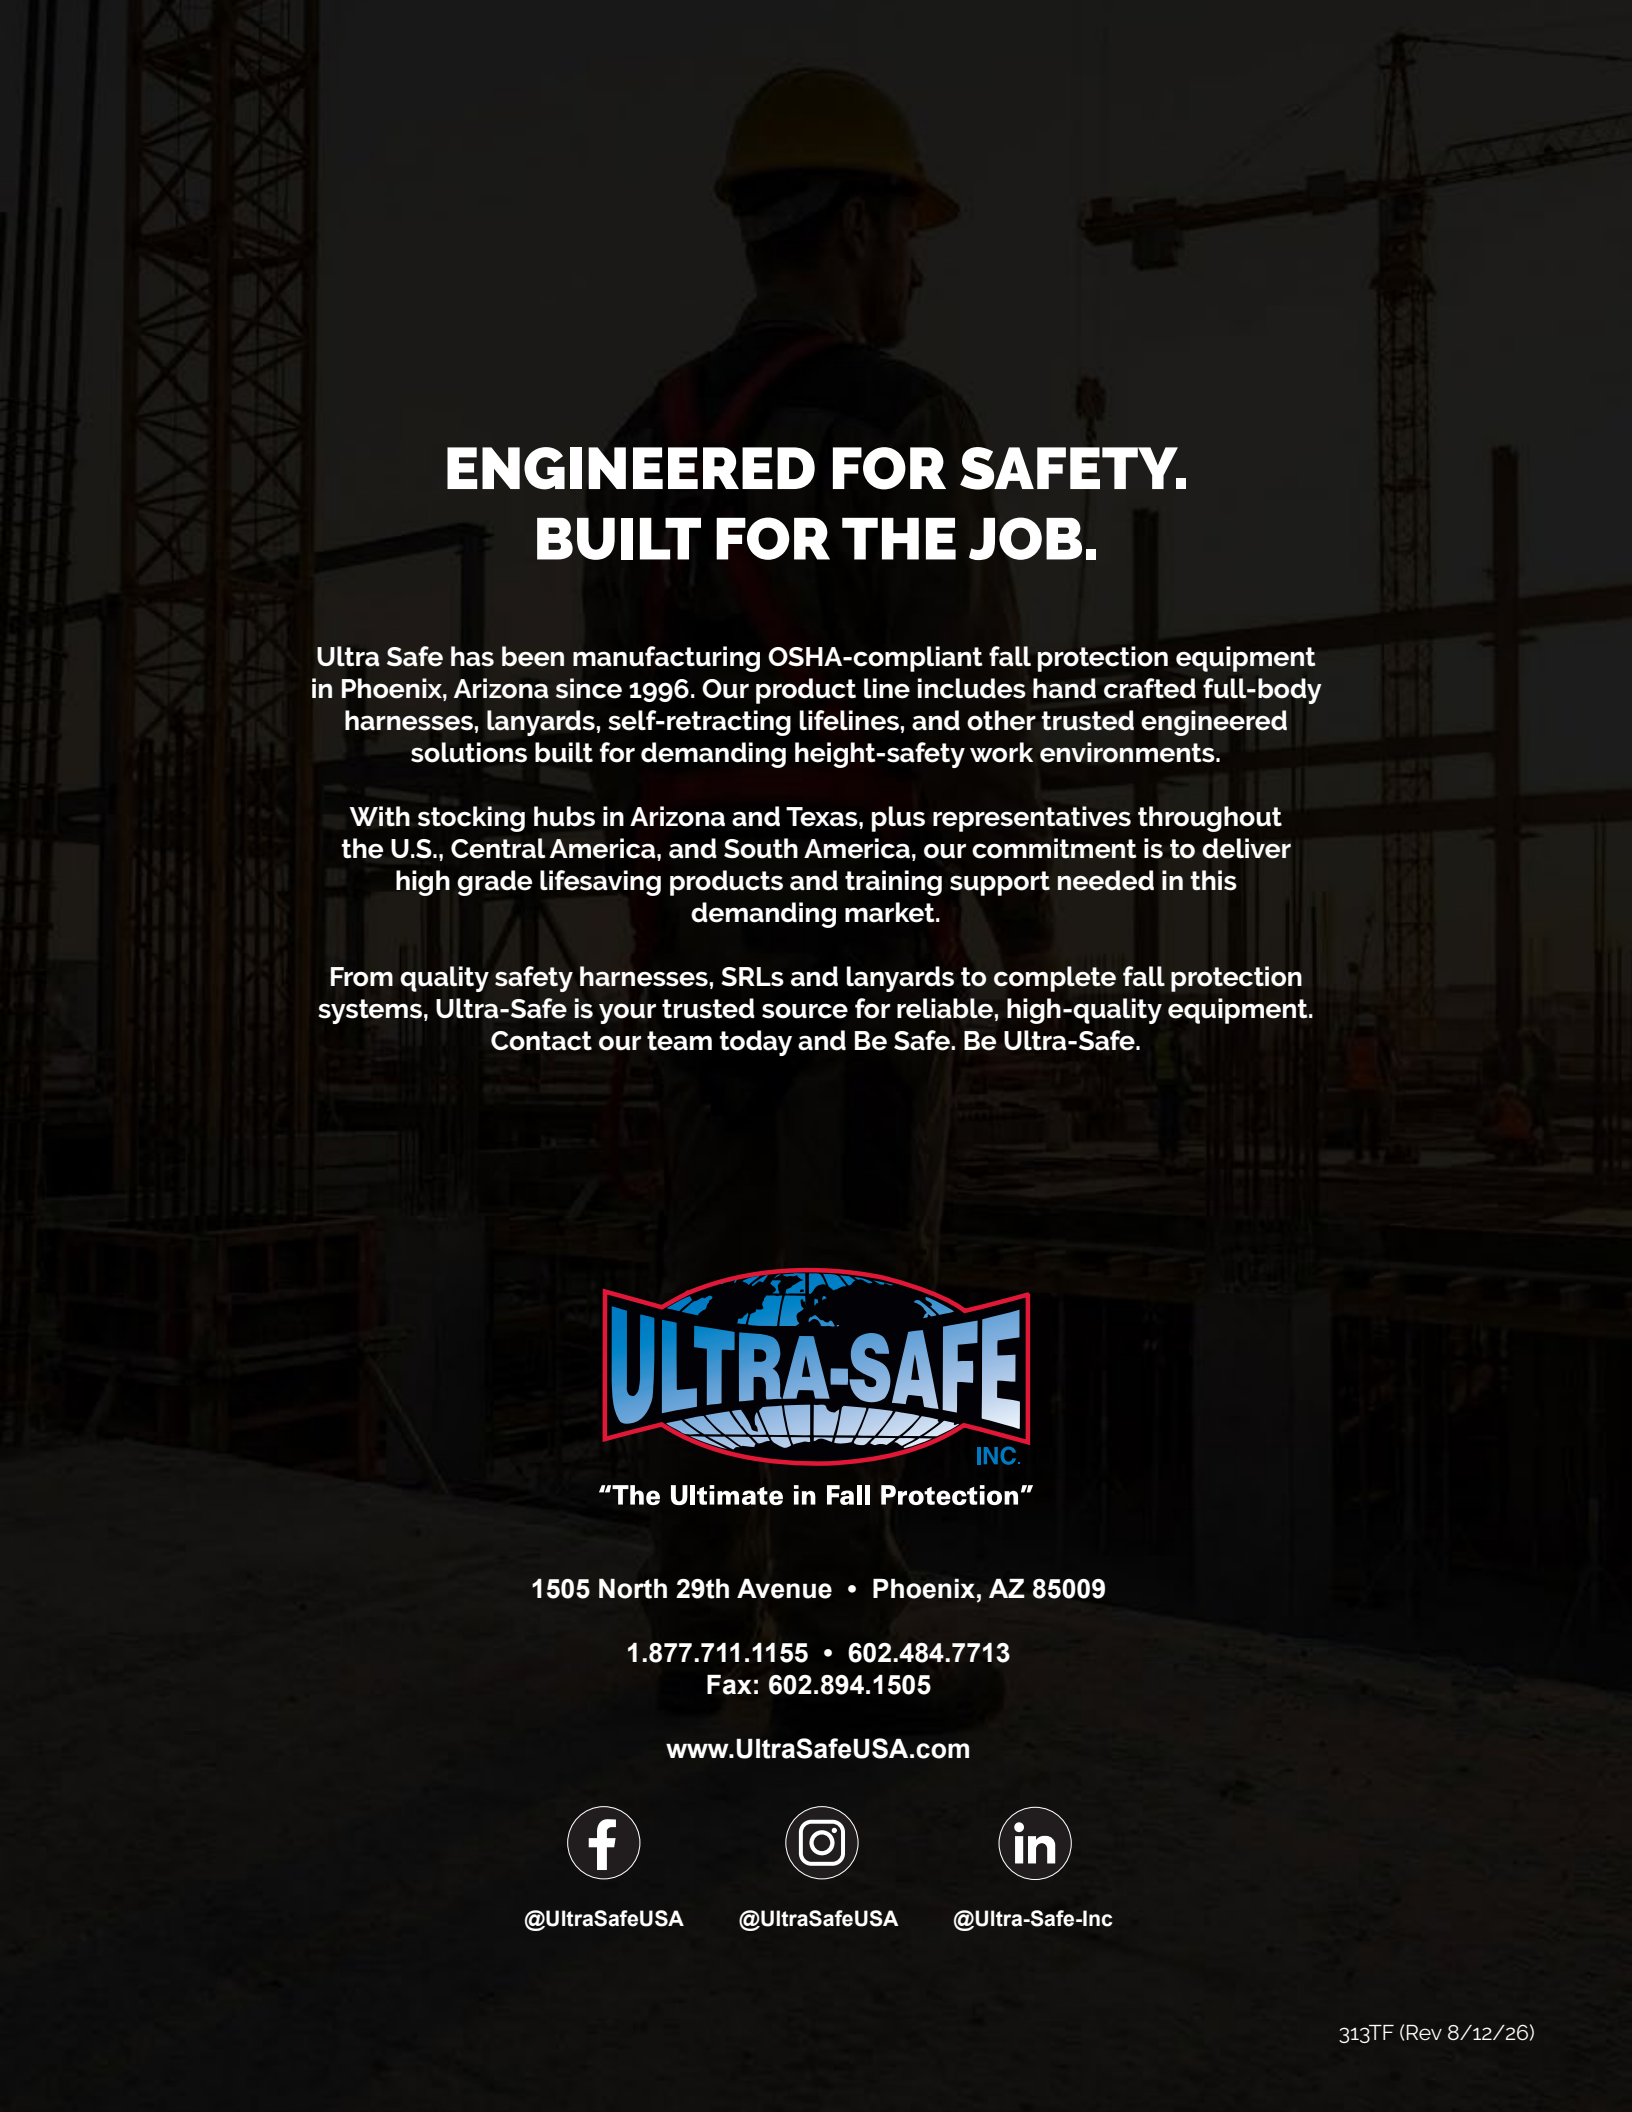

ENGINEERED FOR SAFETY. BUILT FOR THE JOB.

Ultra Safe has been manufacturing OSHA-compliant fall protection equipment in Phoenix, Arizona since 1996. Our product line includes hand crafted full-body harnesses, lanyards, self-retracting lifelines, and other trusted engineered solutions built for demanding height-safety work environments.

With stocking hubs in Arizona and Texas, plus representatives throughout the U.S., Central America, and South America, our commitment is to deliver high grade lifesaving products and training support needed in this demanding market.

From quality safety harnesses, SRLs and lanyards to complete fall protection systems, Ultra-Safe is your trusted source for reliable, high-quality equipment. Contact our team today and Be Safe. Be Ultra-Safe.

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

1505 North 29th Avenue • Phoenix, AZ 85009

1.877.711.1155 • 602.484.7713
Fax: 602.894.1505

www.UltraSafeUSA.com

@UltraSafeUSA @UltraSafeUSA @Ultra-Safe-Inc