ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

MINI CATALOG

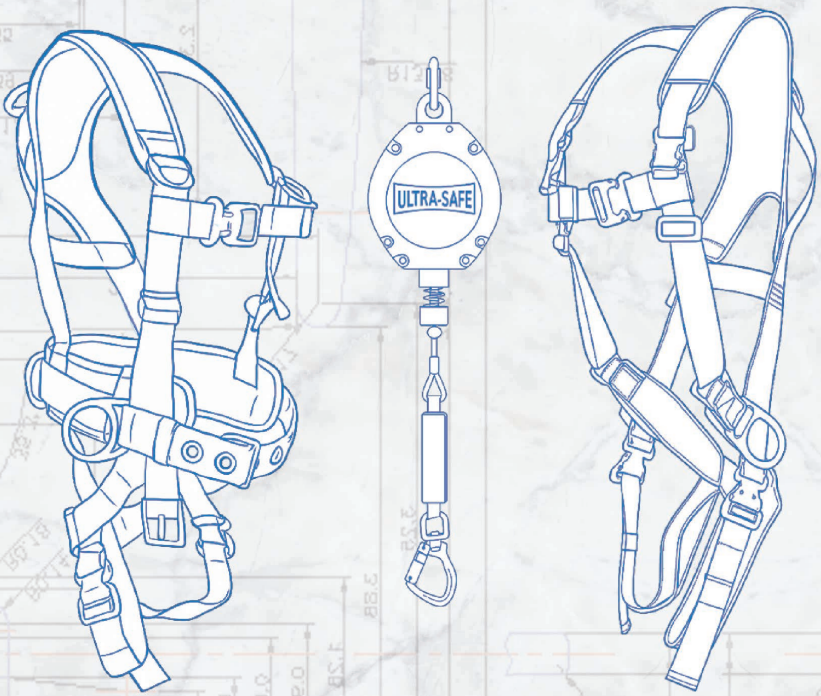

602.484.7713
ultrasafeusa.com
info@ultrasafeusa.com

Scan QR code
to download the
full catalog.

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

CLASS 2 SRL-P RETRACTABLES

ANSI Z359.14-2021

RD-HN8

Includes a small steel hook (96595)

RD-HN8CT

Includes a large steel rebar hook

RD-HN8CA

Includes a large aluminum rebar hook

RD-HNY8

Includes two small steel hooks (96595)

RD-HNY8CT

Includes two large steel rebar hooks

RD-HNY8CA

Includes two large aluminum rebar hooks

OPTIONAL HOOK ATTACHMENT FOR DORSAL D-RING:

3D PLASTIC BUSHINGS

Add "S" To End of Any Swivel Top Part Number

ANSI Z359.14-2021

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

PHX Series SRL Retractables

Sharp Steel, Abrasive Concrete, Plywood, 2x4's and Particle Board are no match for...

THE PHX SERIES

Comes complete with carabiner.

Part #	RD-HN11	RD-HN15	RD-HN20	RD-HN30	RD-HN50	RD-HN66
Length	11 ft / 3 m	15ft / 4.5 m	20 ft / 6m	30ft / 9 m	50 ft / 15 m	66 ft / 20 m
Weight	5.6 lbs / 2.54 kg	6.4 lbs / 2.90 kg	7.2 lbs / 3.25 kg	8.3 lbs / 3.76 kg	14.8 lbs / 6.7 kg	19.8 lbs / 9.0 kg
	Dimensions Inches (mm)					
	A 24.0 (610)	A 24.8 (630)	A 25.4 (645)	A 28.0 (710)	A 29.5 (750)	A 39.5 (1090)
	B 4.7 (120)	B 5.5 (140)	B 7.1 (180)	B 7.5 (190)	B 9.3 (235)	B 9.8 (258)
	C 3.2 (80)	C 3.2 (80)	C 3.5 (88)	C 3.7 (95)	C 3.7 (95)	C 3.9 (96)

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

CLASS 1 SRL-P RETRACTABLES

ANSI Z359.14-2021

APPROVED FOR BOOM TRUCKS AND SCISSOR LIFTS

RD-HPS8L-C1
Working length 8ft

RD-HPS11L-C1
Working length 11ft

RD-HPS20-C1
Working length 20ft

Includes
96594

LEAF SERIES

RD-HPS6L-C1
Includes a snap hook.

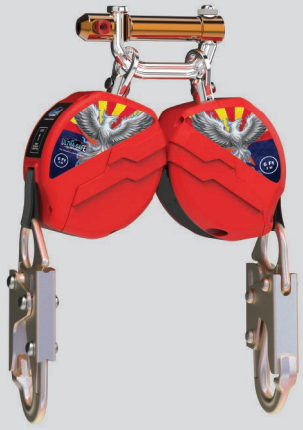

RD-HPS6YL-C1
Includes 2 snap hooks.

CAN BE TURNED INTO A TWIN.
Twin Pin Attachment
US-TPA

OPTIONAL HOOKS FOR RD-HPS 7 & 11

Snap hook.
96595

Large steel rebar hook.
96597CT

Large alum. rebar hook.
96597CA

	1RD-HPS20-C1	RD-HPS6L-C1	RD-HPS6YL-C1
HOUSING	THERMOPLASTIC	THERMOPLASTIC	THERMOPLASTIC
WEBBING	1" UHMWPE	3/4" UHMWPE	3/4" UHMWPE
MAX ARREST DISTANCE (ANSI)	24 INCHES	24 INCHES	24 INCHES
AVG ARREST FORCE (ANSI)	1,350 LBS	1,350 LBS	1,350 LBS
MAX ARREST DISTANCE	24 INCHES	24 INCHES	24 INCHES
CAPACITY (ANSI)	310 LBS	310 LBS	310 LBS
CAPACITY (OSHA)	20 LBS	420 LBS	420 LBS

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

D-ring center back onlywith tongue buckle legs.

96305NT Sm-Lg
96306NT XL

D-ring center back only, with padded leg straps and quick release buckles. Flexible torso.

UPF-96305NQL Sm-Lg
UPF-96306NQL XL

D-ring center, quick release w/padded legs and X-Pad.

UX-96305NQL Sm-Lg
UX-96306NQL XL

Iron worker's type. Back pad and tool belt. Tongue buckle connections.

96396B Sm-Lg
96397B XL

Carpenter's Harness.
D-ring center back only with padded back and quick release buckles. Comes with 3 tool bags and hammer holder in the back

X–96305NQL/CLC5 S-L
X–96306NQL/CLC5 XL

Series 99 Harness.
D-ring center back, hips and front d-ring, with padded leg straps and padded back. Quick release buckles with tool belt

UX-99305WSQL S-L
UX-99306WSQL XL

Scan QR code to see all harnesses

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

LANYARDS & ANCHORS

Shock absorbing kevlar lanyard with double locking hooks each end.
96516K 1 3/4" x 6'

Shock absorbing Y-lanyard with double locking hook and large rebar hooks 100% tie-off.
96516YCT 1 3/4" x 6'

Ultra-Tube two shock-absorbing lanyard.
UTT-96516 1 1/4" x 6'

Ultra-Tube shock-absorbing Y-lanyard with loop one end and large 2 1/4" aluminum rebar hook other end.
UTT-96516LYCA 1 1/4" x 6'



Rope Grab for 5/8" and 3/4" poly-dac rope. Stainless steel.
US-5000

Removable Concrete Anchor.
US-1075CA
Hole Diameter: 3/4"
Min. Breaking load: 5,000 lbs
Meets: ANSI Z359.18-2017

Anchorage Connector
US-5082AC-C
5 3/4" x 5/8" anchor bolt
for 6 1/4" deep hole.
Min. Breaking load : 10,000lbs



Ultra-Glide Beam Anchor Horizontal only. NEW
US-MBG-B14 Beam flange for
3 1/2" - 14" up to 1 1/4" thickness.

Metal Reusable Roof Anchor -
US-5072R
Screw or Nail Down Metal
Reusable Roof Anchor

Roof Anchor Kit.
96950
This unit consists of the following.

- 96305N - Full Body Harness
- 96513 Shock Absorber Lanyard
- US-5000C - Rope Grab for 5/8" poly-dac
- US-5072R - Metal Reusable Anchor
- 96805 - Lifelines w/ Dbl Lock Hook
- US2-BAG - Bag

TRIPOD & DAVIT ARM

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

TRIPOD PRO KIT

US-TRI-KIT

Lightweight yet durable construction provides anchorage for fall protection.

Tripod Legs: Extruded Aluminum
Anklet Galvanized Steel

- **Weight:** 61.7 lbs
- **Max Height:** 8 ft
- **Min Height:** 5 ft
- **Capacity:** 2 persons (Max 310 lbs. per person)
- **Rated:** 5,000 lbs anchor point

US-FAW-66 - SRL-R 3-Way system for fall protection

- **Housing:** Aluminum
- **Cable:** 3/16" Galvanized Steel
- **Working Length:** 66ft
- **Weight :** 35.3 lb

US-MHW66 - Winch - Perfect for elevating and lowering materials or tools to workers engaged in tasks within confined spaces.

- **Housing:** Steel
- **Cable:** 3/16" Galvanized Steel
- **Working Length:** 66ft
- **Weight :** 26.5 lb

PRO-6 DAVIT

US-5056

Modular system, requires no bolts, nuts or pins to assemble. Made out of lightweight material graded 6061-T6 Aluminum

Maximum number of users: Max. 2 users, no more than 310 lbs per anchor point.
Minimum and Max reach: 1.64ft-2.46ft
Min and Max height: 6.43ft-9.15ft
Ultimate strength rating: Jib 3372 lbs / Mast 5000 lbs



HD Floor Mount
US-BFMDB01SS

Wall Mount 4 point
US-BTS0024

Barrel Mount Base
US-30166R

FleXbase
US-30075

Alum. Storage Box
US-30206

Storage/Carry Bag
US-BTS40003B

SIZE DATA SHEET

ULTRA-SAFE INC.

"The Ultimate in Fall Protection"

SIZE DATA SHEET FOR WORKERS UP TO 420 POUNDS

Requirements applicable to personal fall arrest equipment used by workers weighing up to 400 pounds (including personal weight, weight° of clothing, tools and objects worn by the worker).

We can customize any style harness. call for a quote today!

EMPLOYEE (USER) INFORMATION

Name: _____

Torso Length: _____

Chest Circumference: _____

Waist Circumference: _____

Upper Thigh Circumference: _____

Hip/Seat Circumference: _____

Body Weight: _____

Total Weight: _____
(Including clothing and tools)

EMPLOYEE (USER) INFORMATION

Company: _____

Address: _____

_____

Phone: _____

Fax: _____

Supervisor: _____

Products/Systems Sought: _____

_____

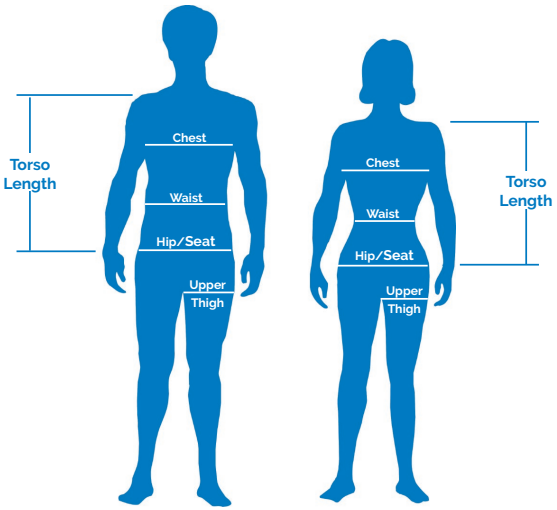

Scan QR code to download the full catalog.